

**Electrical**

Impedance: 50 Ohms


Frequency Range: DC - 11 GHz

Typical PIM level: -165 dBc

**Mechanical (Typical)**

Connector Durability: 500 matings

MATERIALS		
	Materials	Finishing
Body	Brass	Tri-Metal
Insulator	PTFE	None
Center contact	Beryllium Copper for Female	Silver
Center contact	Brass for Male	Silver

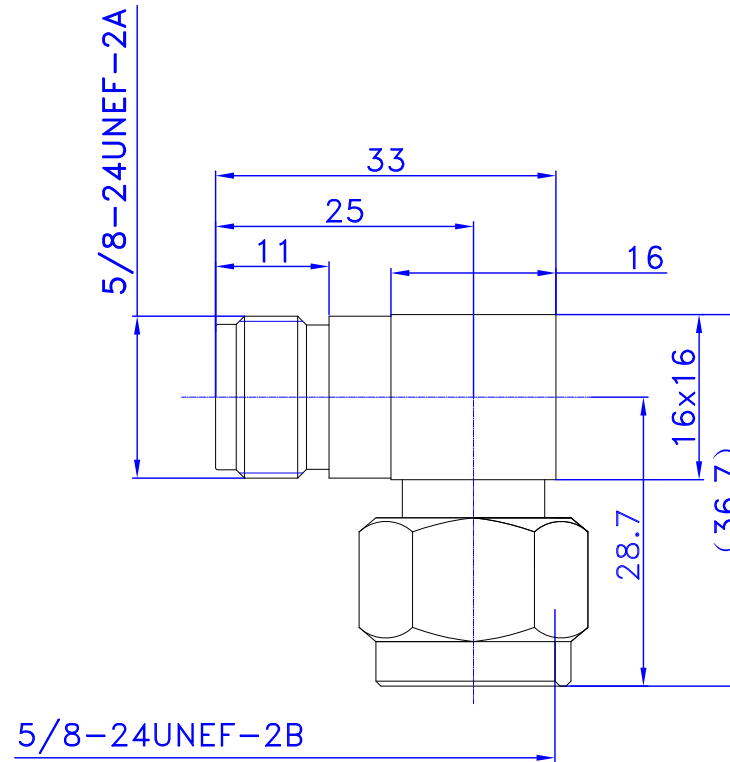

All dimensions are in MM

SIZE A	SCALE NO	
REV. A	SHEET 1/1	
PART NO. 2322-232-502PIM		TITLE Low PIM N Male, N Female RT/A Adaptor

**evissap**  
RF Interconnect Solutions